

CVS-280

280W SINGLE OUTPUT DC/DC CONVERTERS

GENERAL FEATURES:

Designed according to EN50155:2017

Input voltage according:

EN50163:2006

EN50124-2:2017

Fire and smoke: EN45545-2 pending

High input-output isolation 7 kVrms

Output ORing diode

Input voltage OK LED

Output voltage OK LED

Overtemperature shutdown



Model	Nominal input voltages	Nominal output voltage
CVS-280-6973	600 / 750 V	24 V
CVS-280-6975	600 / 750 V	48 V
CVS-280-6976	600 / 750 V	72 V
CVS-280-6977	600 / 750 V	110 V



INPUT	
Nominal DC input voltage	600 / 750 V according to EN50163:2006 and EN50124-2:2017
Minimum DC input voltage	400 V
Maximum DC input voltage	1100 V continuous 3 kV falling to 1.5 kV for 20 ms, 4.5 kV falling to 2.25 kV for 1 ms
Maximum input ripple	75 Vpp from 50 to 360Hz
Maximum input current	0.84 A
Input consumption at no load	$\leq 7 \text{ W @ } 600 \text{ V}_{in}, \leq 9 \text{ W @ } 750 \text{ V}_{in}$
Input undervoltage shutdown	45 % to 55 % $V_{i \text{ nom}}$
OUTPUT	
Output voltage	See previous table
Voltage tolerance	$\leq \pm 1 \%$
Maximum peak current (Iopk) time	500 ms
Total regulation	$< \pm 1 \%$
Ripple	$< 100 \text{ mVpp at } T_a > 0^\circ\text{C}$ $< 240 \text{ mVpp at } T_a -40^\circ\text{C}$
Ripple + noise (BW 20 MHz)	$\leq 1\%$ of nominal output voltage
Maximum continuous power	280 W
Peak power	400 W
ENVIRONMENTAL	
Storage temperature	-40 ... 85 °C
Operating temperature range at Io= 100%	-40 ... 70 °C
Operating temperature range at Io= 62.5%	-40 ... 85 °C
Cooling	Natural convection
Operating altitude	2500 m
Maximum Relative humidity	95 % with no condensation
Shock and vibration	EN61373:2010 Category 1 class B body mounted
Service life	> 20 years
MTBF	200.000 h @ 40 °C according to IEC61709
EMC	
Emission	EN50121-3-2:2016
Immunity	EN50121-3-2:2016
SAFETY	
Safety according to norm	EN50124-1:2017 Railway app. (Insulation coordination)
Dielectric strength Input / Output	7000 Vac 50 Hz 10 s
Dielectric strength Input / Earth	5300 Vac 50 Hz 10 s
Dielectric strength Output / Earth	1800 Vac 50 Hz 1 min
Protection Degree	IP20
Fire and smoke	EN45545-2:2013 +A1:2015
MECHANICAL	
Dimensions	65 x 162 x 230 mm
Weight	1750 g
CONTROL	
Low output voltage alarm	Threshold: 0.9 ... 0.95 $V_o \text{ nom}$. Isolated solid state relay open when alarm. Maximum rating contact capacity 100 mA and 160 V (closed $< 8 \Omega$)
Remote inhibit input	Inhibit voltage range: Nominal Output Voltage $\pm 40 \%$
PROTECTIONS	
Against output overloads and short-circuits	Current limiting
Against reverse input voltage	By input diode in serial connection.
Against input under-voltage	Under-voltage lock-out. See Note 2
Against Input over-currents	Input fuse
Against Overtemperature	Shutdown when internal temperature rises 120 °C
Others	PCB conformal coated with acrylic varnish

Note-1: Do not handle the connection terminals below -25°C




Note-2: In case of lock-out, a pulse of inhibit signal is needed to reset the converter (minimum 100ms); or remove the input supply voltage for at least 3 seconds.

ORDERING CODES

Model	Nominal Input Voltages [V]	Input Voltage Range [V]	Nominal Output Voltage [V]	Max Output Current [A]	Max Output Power [W]	Output Peak Current [A]	Output Peak Power [W]	Efficiency @750V _{in} [%]
CVS-280-6973	600 / 750	400 - 1100	24	11.6	280	16.6	400	88
CVS-280-6975	600 / 750	400 - 1100	48	5.8	280	8.3	400	88
CVS-280-6976	600 / 750	400 - 1100	72	3.8	280	5.67	400	89
CVS-280-6977	600 / 750	400 - 1100	110	2.5	280	3.64	400	89.5

Accessories must be ordered in a separate order line

BLOCKS DIAGRAM

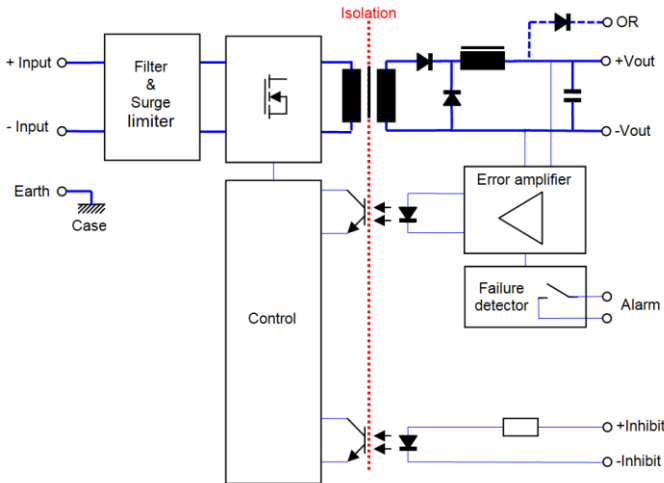

DESCRIPTION

The CVS-280 series consists of DC/DC converters, with a galvanic isolation between input and output, operating at fixed switching frequency.

It includes an output ORing diode which allows redundancy. It also allows paralleling with a battery.


The device is protected against overload and short-circuits by means of a current limiting circuit.

The device is also protected against reverse polarity input voltage by means of an input diode in series with the input line.

When an input undervoltage condition occurs, the converter is disabled, thus preventing an improper output voltage. Once the input is within the range the unit restarts automatically.

The failure output voltage detector circuit close the contact (NO) when the output voltage is higher than 90..95 % of the nominal output voltage.

CONNECTIONS

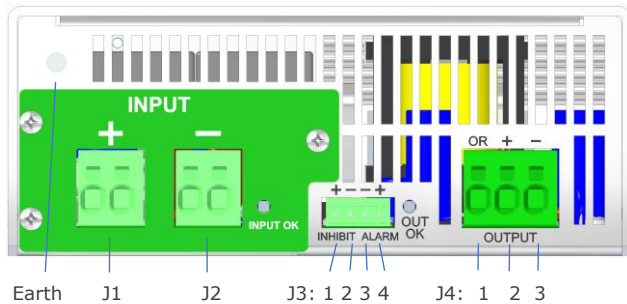


Note 1: maximum spring terminals cross section cable 6mm² or 10 mm² for solid

Note 2: J3 recommended female connector Phoenix Contact FMC 1,5/4-ST-3,81 or MC 1,5/4-ST-3,81


Note 3: maximum nut torque in M5 earth connection 1.9 Nm

	Function
Earth	M5 male earth connection
J1	Positive input clamp terminal (x2)
J2	Negative input clamp terminal (x2)
J3-1	Positive input inhibit signal
J3-2	Negative input inhibit signal
J3-3	Alarm output state contact 1
J3-4	Alarm output state contact 2
J4-1	Positive output clamp terminal by Oring
J4-2	Positive output clamp terminal
J4-3	Negative output clamp terminal

TYPICAL OUTPUT CHARACTERISTIC

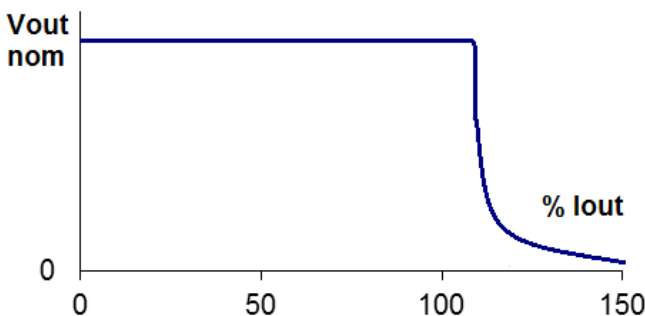


POWER DERATING vs AMBIENT TEMP.

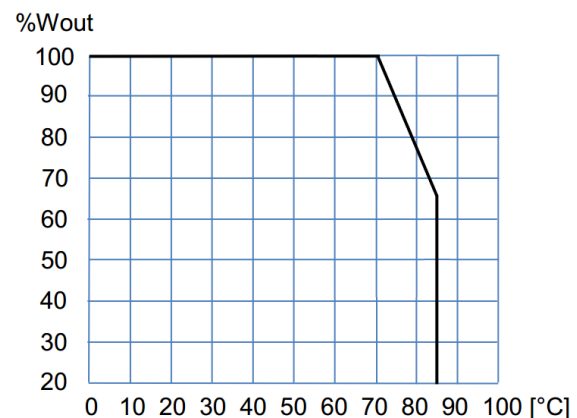



DIMENSIONS

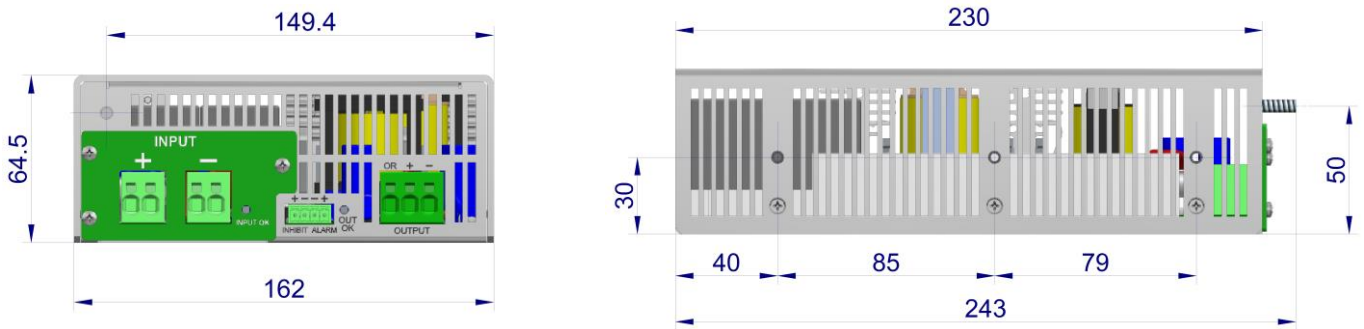


Lateral fixing holes 6 x M4 (screw torque < 1.6 Nm). Maximum screw deep 6 mm.

ACCESSORIES

DESCRIPTION	NOTES	CODE
Mounting brackets kit	Contains two brackets and screws	NP-9435

NP-9435

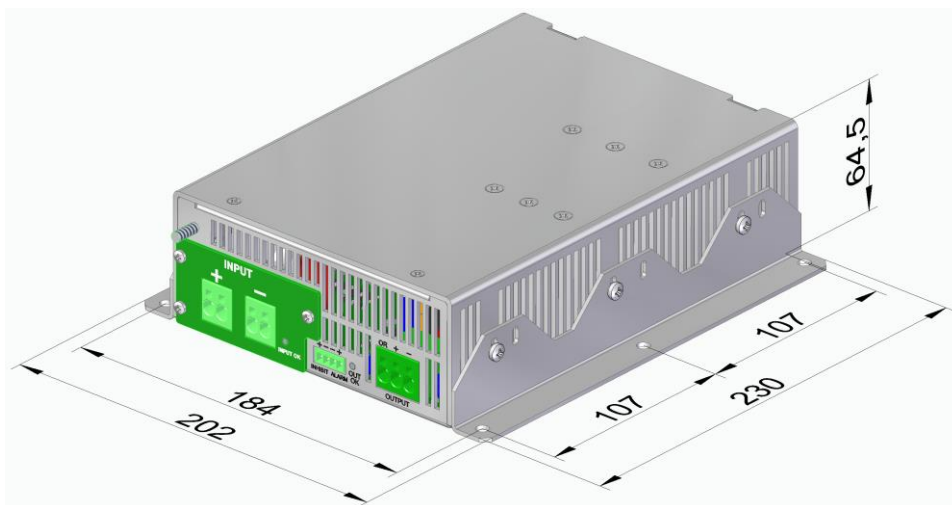



EU, UKCA DECLARATION OF CONFORMITY

The undersigned, representing the following:

Manufacturer: PREMIUM, S. A.,
Address: C/ Dolors Aleu 19-21, 08908 L'Hospitalet de Llobregat, SPAIN

herewith declares that the product:

Type: DC/DC converter
Models: **CVS-280-6973 ... 6977**

is in conformity with the provisions of the following EU directive(s):

2014/35/EU SI 2016 No 1101	Low voltage / The electrical equipment (safety) regulations
2014/30/EU SI 2016 No 1091	EMC / Electromagnetic compatibility regulations
2011/65/EU Annex II and its amendment 2015/863/EU SI 2012 No. 3032	RoHS / Restriction of the use of certain hazardous substances in electrical and electronic equipment

and that standards and/or technical specifications referenced below have been applied:

EN 60950-1: 2005	Safety. Information technology equipment
EN 62368-1: 2014	Safety. Audio/video information and communication technology equipment
EN 61000-6-3: 2007	Generic emission standard
EN 61000-6-2: 2005	Generic immunity standard
EN 50155: 2017*	Railway applications. Electronic equipment used on rolling stock material
EN 50121-3-2: 2016*	Railway applications. EMC Rolling stock equipment
EN 50163: 2016	Railway applications. Supply voltages of traction systems

* See annexe

CE marking year: **2020**; UKCA marking year: **2021**

Notes:

For the fulfillment of this declaration the product must be used only for the aim that has been conceived, considering the limitations established in the instructions manual or datasheet.

L'Hospitalet de Llobregat, 31-05-2021

Miguel Angel Fernandez
Chief Research & Development Officer

PREMIUM S.A. is an ISO9001 and ISO14001
certified company by **Bureau Veritas**

ANNEXE

Applicable values for the different sections of the norm EN50155: 2017																																																																	
4.3.1	Working altitude	Up to 2500m																																																															
4.3.2	Ambient temperature	Class OT4: load < 100% Class OT6: load < 62.5%																																																															
4.3.3	Switch-on extended operating temp.	Class ST1, ST2																																																															
4.3.4	Rapid temperature variations	Class H1																																																															
4.3.5	Shocks and vibrations	According EN61373:2010 Category 1 class B																																																															
4.3.6	EMC Electromagnetic Compatibility EN50121-3-2:2015	<table border="1"> <thead> <tr> <th>Test</th> <th>Norm</th> <th>Port</th> <th>Frequency</th> <th>Limits</th> </tr> </thead> <tbody> <tr> <td rowspan="3">Radiated emissions</td> <td rowspan="3">IEC55016</td> <td rowspan="3">Case</td> <td>30MHz...230MHz</td> <td>40dB(μV/m) Qpk at 10m</td> </tr> <tr> <td>230MHz...1GHz</td> <td>47dB(μV/m) Qpk at 10m</td> </tr> <tr> <td>1...3GHz 3...6GHz</td> <td>Do not apply Internal freq. < 108MHz</td> </tr> <tr> <td rowspan="2">Conducted emissions</td> <td rowspan="2">IEC55016</td> <td rowspan="2">Output</td> <td>150kHz...500kHz</td> <td>99dB(μV) Qpk</td> </tr> <tr> <td>500kHz...30MHz</td> <td>93dB(μV) Qpk</td> </tr> </tbody> </table>	Test	Norm	Port	Frequency	Limits	Radiated emissions	IEC55016	Case	30MHz...230MHz	40dB(μV/m) Qpk at 10m	230MHz...1GHz	47dB(μV/m) Qpk at 10m	1...3GHz 3...6GHz	Do not apply Internal freq. < 108MHz	Conducted emissions	IEC55016	Output	150kHz...500kHz	99dB(μV) Qpk	500kHz...30MHz	93dB(μV) Qpk																																										
		Test	Norm	Port	Frequency	Limits																																																											
		Radiated emissions	IEC55016	Case	30MHz...230MHz	40dB(μV/m) Qpk at 10m																																																											
					230MHz...1GHz	47dB(μV/m) Qpk at 10m																																																											
					1...3GHz 3...6GHz	Do not apply Internal freq. < 108MHz																																																											
		Conducted emissions	IEC55016	Output	150kHz...500kHz	99dB(μV) Qpk																																																											
					500kHz...30MHz	93dB(μV) Qpk																																																											
		<table border="1"> <thead> <tr> <th>Test</th> <th>Norm</th> <th>Port</th> <th>Severity</th> <th>Conditions</th> <th>P</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Electrostatic discharge</td> <td rowspan="2">IEC61000-4-2</td> <td rowspan="2">Case</td> <td>±8kV</td> <td>Air (isolated parts)</td> <td rowspan="2">B</td> </tr> <tr> <td>±8kV</td> <td>Contact (conductive parts)</td> </tr> <tr> <td rowspan="4">Radiated high-frequency</td> <td rowspan="4">IEC61000-4-3</td> <td rowspan="4">X/Y/Z Axis</td> <td>20V/m</td> <td>0.08...1.0GHz M. 80% 1kHz</td> <td rowspan="4">A</td> </tr> <tr> <td>10V/m</td> <td>1.4...2.1GHz M. 80% 1kHz</td> </tr> <tr> <td>5V/m</td> <td>2.1...2.5GHz M. 80% 1kHz</td> </tr> <tr> <td>3V/m</td> <td>5.1...6Ghz M. 80% 1kHz</td> </tr> <tr> <td rowspan="4">Fast transients</td> <td rowspan="4">IEC61000-4-4</td> <td rowspan="4">Input Output Signal P</td> <td>±2kV</td> <td rowspan="4">Tr/Th: 5/50 ns</td> <td rowspan="4">A</td> </tr> <tr> <td>±2kV</td> </tr> <tr> <td>±2kV</td> </tr> <tr> <td>±1kV</td> </tr> <tr> <td rowspan="2">Surge</td> <td rowspan="2">IEC61000-4-5</td> <td rowspan="2">Input L to L Input L to P</td> <td>±1kV</td> <td rowspan="2">Tr/Th: 1.2/50μs</td> <td rowspan="2">B</td> </tr> <tr> <td>±2kV</td> </tr> <tr> <td rowspan="4">Conducted RF</td> <td rowspan="4">IEC61000-4-6</td> <td rowspan="4">Input Output Signal P</td> <td>10V</td> <td rowspan="4">0.15...80MHz M. 80% 1kHz</td> <td rowspan="4">A</td> </tr> <tr> <td>10V</td> </tr> <tr> <td>10V</td> </tr> <tr> <td>10V</td> </tr> <tr> <td>Magnetic field</td> <td>IEC61000-4-8</td> <td>X/Y/Z Axis</td> <td>300A/m</td> <td>0Hz, 16.7Hz, 50/60Hz</td> <td>A</td> </tr> <tr> <td>Pulse magnetic field</td> <td>IEC61000-4-9</td> <td>X/Y/Z Axis</td> <td>300A/m</td> <td>Tr/Th: 6.4/16μs</td> <td>B</td> </tr> </tbody> </table>	Test	Norm	Port	Severity	Conditions	P	Electrostatic discharge	IEC61000-4-2	Case	±8kV	Air (isolated parts)	B	±8kV	Contact (conductive parts)	Radiated high-frequency	IEC61000-4-3	X/Y/Z Axis	20V/m	0.08...1.0GHz M. 80% 1kHz	A	10V/m	1.4...2.1GHz M. 80% 1kHz	5V/m	2.1...2.5GHz M. 80% 1kHz	3V/m	5.1...6Ghz M. 80% 1kHz	Fast transients	IEC61000-4-4	Input Output Signal P	±2kV	Tr/Th: 5/50 ns	A	±2kV	±2kV	±1kV	Surge	IEC61000-4-5	Input L to L Input L to P	±1kV	Tr/Th: 1.2/50μs	B	±2kV	Conducted RF	IEC61000-4-6	Input Output Signal P	10V	0.15...80MHz M. 80% 1kHz	A	10V	10V	10V	Magnetic field	IEC61000-4-8	X/Y/Z Axis	300A/m	0Hz, 16.7Hz, 50/60Hz	A	Pulse magnetic field	IEC61000-4-9	X/Y/Z Axis	300A/m	Tr/Th: 6.4/16μs	B
		Test	Norm	Port	Severity	Conditions	P																																																										
		Electrostatic discharge	IEC61000-4-2	Case	±8kV	Air (isolated parts)	B																																																										
					±8kV	Contact (conductive parts)																																																											
		Radiated high-frequency	IEC61000-4-3	X/Y/Z Axis	20V/m	0.08...1.0GHz M. 80% 1kHz	A																																																										
					10V/m	1.4...2.1GHz M. 80% 1kHz																																																											
					5V/m	2.1...2.5GHz M. 80% 1kHz																																																											
					3V/m	5.1...6Ghz M. 80% 1kHz																																																											
Fast transients	IEC61000-4-4	Input Output Signal P	±2kV	Tr/Th: 5/50 ns	A																																																												
			±2kV																																																														
			±2kV																																																														
			±1kV																																																														
Surge	IEC61000-4-5	Input L to L Input L to P	±1kV	Tr/Th: 1.2/50μs	B																																																												
			±2kV																																																														
Conducted RF	IEC61000-4-6	Input Output Signal P	10V	0.15...80MHz M. 80% 1kHz	A																																																												
			10V																																																														
			10V																																																														
			10V																																																														
Magnetic field	IEC61000-4-8	X/Y/Z Axis	300A/m	0Hz, 16.7Hz, 50/60Hz	A																																																												
Pulse magnetic field	IEC61000-4-9	X/Y/Z Axis	300A/m	Tr/Th: 6.4/16μs	B																																																												
		P= Performance criteria, L= Line, P= PE (Protective Earth)																																																															
4.3.7	Relative humidity	Up to 95%																																																															
5.1.1.2	DC power supply range	From 0.70 to 1.25 Un continuous																																																															
5.1.1.3	Temporary DC power supply fluctuation	From 0.60 to 1.40 Un 0.1s From 1.25 to 1.40 Un 1s without damage																																																															
5.1.1.4	Interruptions of voltage supply	Class S3 (20ms)																																																															
5.1.1.6	Input ripple factor	10% peak to peak with a DC Ripple Factor of 5 %																																																															
5.1.3	Supply change-over	0,6 Un duration 100 ms (without interruptions). Performance criterion A																																																															
7.2.7	Input reverse polarity protection	By serial diode in the input																																																															
10.7	Protective coating for PCB assemblies	Class PC2																																																															
13.3	Tests list	<table border="0"> <tr> <td>1 Visual Inspection</td> <td>Routine</td> </tr> <tr> <td>2 Performance test</td> <td>Routine</td> </tr> <tr> <td>3 Power supply test</td> <td>Routine</td> </tr> <tr> <td>4 Insulation test</td> <td>Routine</td> </tr> <tr> <td>5 Low temperature storage test</td> <td>-</td> </tr> <tr> <td>6 Low temperature start-up test</td> <td>Type</td> </tr> <tr> <td>7 Dry heat test</td> <td>Type</td> </tr> <tr> <td>8 Cyclic damp heat test</td> <td>Type</td> </tr> <tr> <td>9 Salt mist test</td> <td>-</td> </tr> <tr> <td>10 Enclosure protection test (IP code)</td> <td>-</td> </tr> <tr> <td>11 EMC test</td> <td>Type</td> </tr> <tr> <td>12 Shocks and vibrations test</td> <td>Type</td> </tr> <tr> <td>13 Equipment stress screening test</td> <td>Routine: 24h at 40°C and load 100%</td> </tr> <tr> <td>14 Rapid Temperature variation test</td> <td>Type</td> </tr> </table>	1 Visual Inspection	Routine	2 Performance test	Routine	3 Power supply test	Routine	4 Insulation test	Routine	5 Low temperature storage test	-	6 Low temperature start-up test	Type	7 Dry heat test	Type	8 Cyclic damp heat test	Type	9 Salt mist test	-	10 Enclosure protection test (IP code)	-	11 EMC test	Type	12 Shocks and vibrations test	Type	13 Equipment stress screening test	Routine: 24h at 40°C and load 100%	14 Rapid Temperature variation test	Type																																			
1 Visual Inspection	Routine																																																																
2 Performance test	Routine																																																																
3 Power supply test	Routine																																																																
4 Insulation test	Routine																																																																
5 Low temperature storage test	-																																																																
6 Low temperature start-up test	Type																																																																
7 Dry heat test	Type																																																																
8 Cyclic damp heat test	Type																																																																
9 Salt mist test	-																																																																
10 Enclosure protection test (IP code)	-																																																																
11 EMC test	Type																																																																
12 Shocks and vibrations test	Type																																																																
13 Equipment stress screening test	Routine: 24h at 40°C and load 100%																																																																
14 Rapid Temperature variation test	Type																																																																